



Curva 90° realizzata fino a DE 315 per stampaggio ad iniezione in HDPE vergine al 100% e da DE 338 realizzata per stampaggio rotazionale in LLDPE vergine al 100%, fornito da azienda certificata UNI EN ISO 9001/2000.

NORMATIVE: **UNI EN 13476**

MATERIALE: **PEAD/ LLDPE**




90° bend produced, up to DE 315 by injection molding in 100% HDPE and from DE 338 by rotational molding in 100% LLDPE, supplied by a UNI EN ISO 9001/2000 certified company.

NORMATIVE: **UNI EN 13476**

MATERIAL: **HDPE / LLDPE**



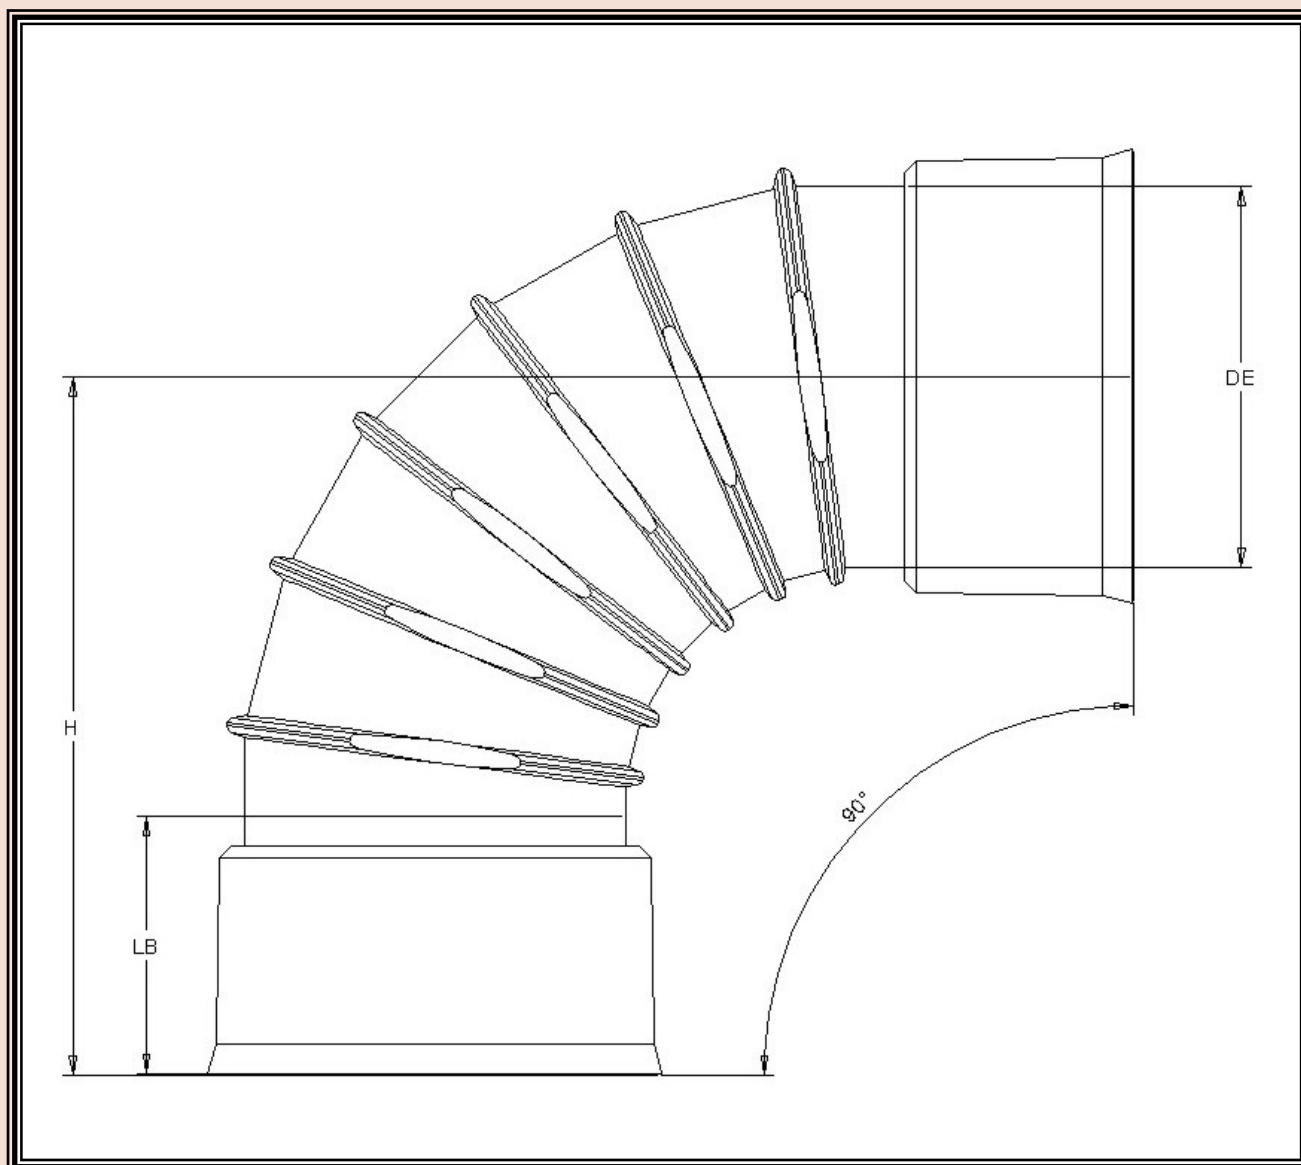

DE	H	LB	Tolleranze
mm	mm	mm	mm
<b>160</b>	153	67	+/- 1
<b>200</b>	194	82.5	+/- 1
<b>250</b>	272.5	160	+/- 20
<b>315</b>	415	185	+/- 20
<b>338/350</b>	566	215	+/- 20
<b>400</b>	560	210	+/- 30
<b>452/468</b>	750	250	+/- 30
<b>500</b>	685	230	+/- 30
<b>630</b>	850	240	+/- 30